

PAY WINDOW



Secure transfers of documents and other items for a safer welcome

Each product in the range is designed to facilitate communication without the need for an intercom, while protecting personnel from germs and physical attacks. These pay windows provide protection against vandalism and are bullet-proof up to level BR4S (in accordance with the EN1063 standard). They can be installed either indoors or outdoors (in a sheltered area), incorporated into a pane or a concrete wall.

These models are designed to protect personnel from germs and physical attacks. These pay windows are fitted with a sound amplification and transfer system designed for optimum acoustic comfort (exclusive vibrating Tymbrane). The Duetto without transfer flap can be installed in addition to the Duetto coin-handling system. The Duetto with transfer flap can be used to safely and easily transfer small documents.

DUETTO WITH/WITHOUT TRANSFER FLAP




References:

A74003 Duetto with transfer flap

A74002 Duetto without transfer flap



DO YOU KNOW?

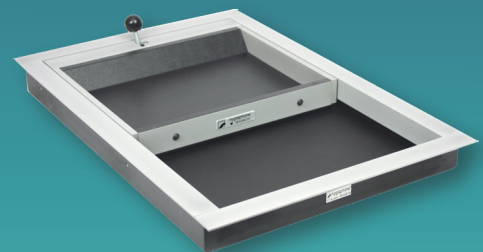

Other models in the Pay window range

- Parabal (BR4 level ballistic protection)

DUETTO WITH/ WITHOUT TRANSFER FLAP

Specifications

- Vibrating Tymbrane that provides protection against drafts and germs
- Cast aluminium frame, RAL AXO400 gray (RAL 7042 textured equivalent)
- 2 glazing (one straight and one dome-shaped) able to withstand objects being throw, P2A class in accordance with the EN 356 standard
- Delivered assembled with screw and fastening kit A74025
- Use: indoors or outdoors (sheltered)
- Resistance : vandalism proof
- For the A74002, flap opening is manual and «Closed» label is not supplied
- The model A74002 is compatible with the Duetto coin-handling system A74001

Installation

- Duetto can be installed in door and windows of all types. The thickness of the filling must be between 8 and 12 mm.
- It is possible to integrate the Duetto in a masonry reservation → A74171.





Applications

- Embassies
- Reception desks
- Public authorities
- Hospitals
- Cinemas

Advantages

- Excellent acoustics
- Provides protection against drafts
- Provide protection against germs, physical attacks and vandalism
- Avoids the need for an intercom
- Quick and easy to install
- Requires very little maintenance

Dimensions

Dimensions (mm)	Duetto without transfer flap	Duetto with transfer flap	
			
	Overall	Overall	Useful flap width
Height	450	578	115
Width	360	360	250
Depth	90	90	—
Weight (kg)	8.5	9.5	
Size of area to be reserved (H x L)	430 x 310	570 x 310	


Packaging

	Duetto without transfer flap	Duetto with transfer flap
Weight of packaging + device	10.3 kg	11.2 kg
Packaging dimensions	630 x 480 x 210 mm	630 x 480 x 210 mm
Type of packaging	Box + polystyrene foam	


DUETTO WITH/ WITHOUT TRANSFER FLAP

Technical specifications

Duetto with transfer flap A74003

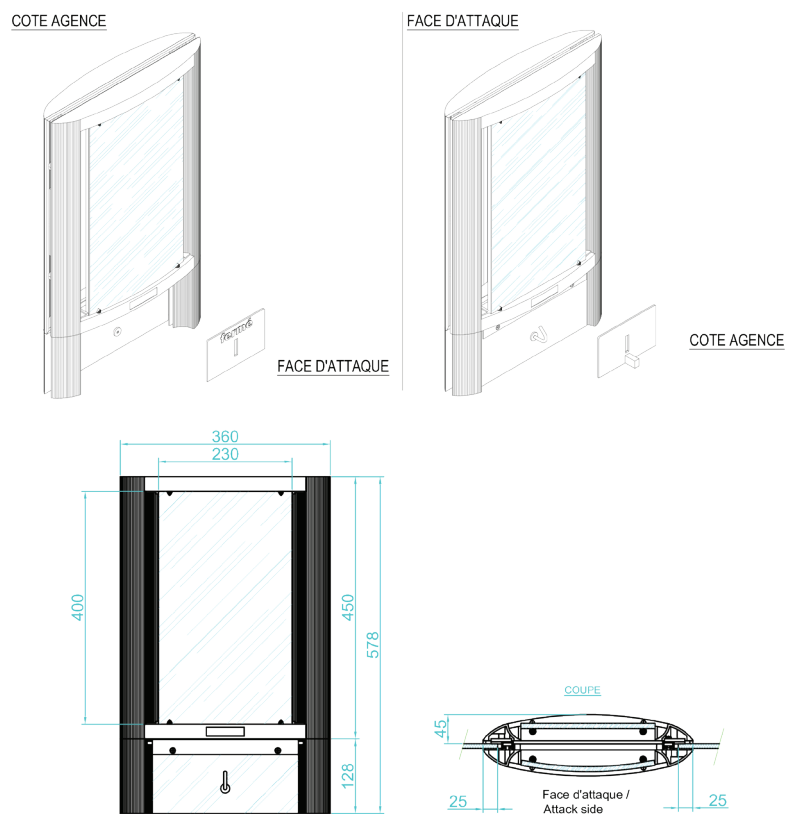

Duetto without transfer flap A74002

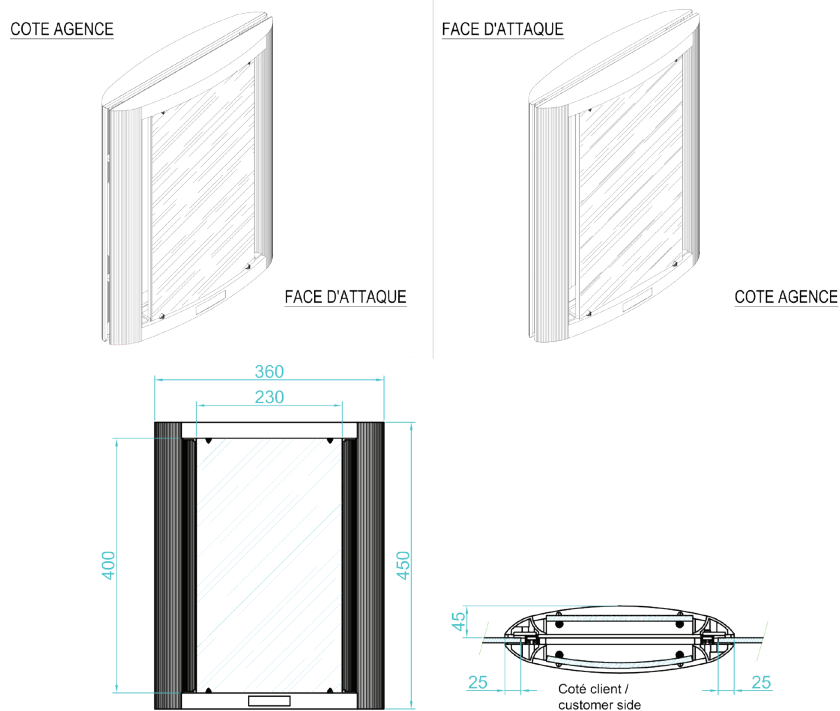



www.hygiaphone.fr

